



OR Series ozone generator

Ozone air corona discharge (CD)




Ozone generators series

General

BODYCARE Ozone's OR Series ozone generators utilize corona discharge (CD) ozone generating technologies. It's suitable for air treatment such as odor remove, air sterilization, food cold storage and etc. in commercial and industrial application.

BODYCARE Ozone's OR Series utilize patented module design. OR Series Ozone air generation module made from borosilicate isolation tube, solid state mid-frequency high voltage power supply, aluminum high voltage electrode, plastic smart clamp, aluminum turbine blower, easy service design for longer reliable use.

All OR Series have an adjustable ozone output level to allow maximum output for short treatments, or lower levels for longer treatments or continuous use. These series are designed for use in uninhabited locations, environment ozone level sensor or programmable timer optional.

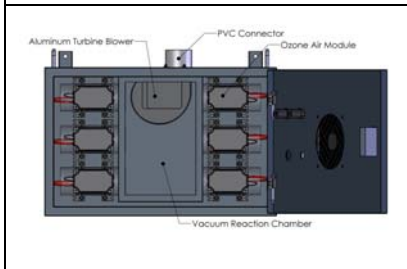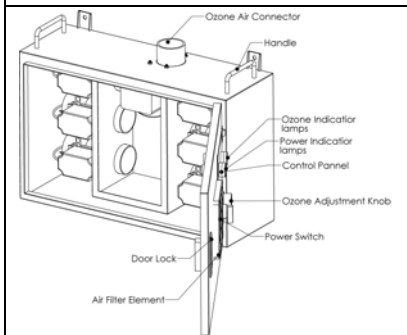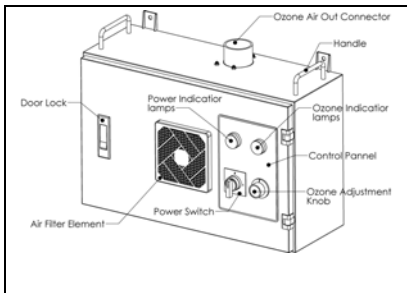

Features of OR series

- Vacuum draw, ambient air as feed air, without using air dryers or oxygen gas
- OD: 50mm PVC ozone air out put connector
- Modular designed for easy service and maintenance
- Ozone air out put adjustable
- AUX socket, can be remote controlled by environment ozone level sensor or programmable timer
- Gray powder coated steel enclosure
- Air-cooled, wall mount and cabinet

Contact us



SHENYANG BODYCARE OZONE EQUIPMENT MANUFACTURE

Website: www.bodycareozone.com

PHONE: +86-24-89722179 FAX: +86-24-89722178

E-mail: bodycareozone@188.com

Add: 29-18 Jingshenxi 3RD Str. Daoyi Economic Development Dis. Shenyang 110136, P.R. China

E-MAIL: bodycareozone@188.com Web: <http://www.bodycareozone.com>

TEL: +86-24-89722179 FAX: +86-24-89722178






OR Series ozone generator

Ozone air corona discharge (CD)

Ozone generators series

INSIDE VIEW

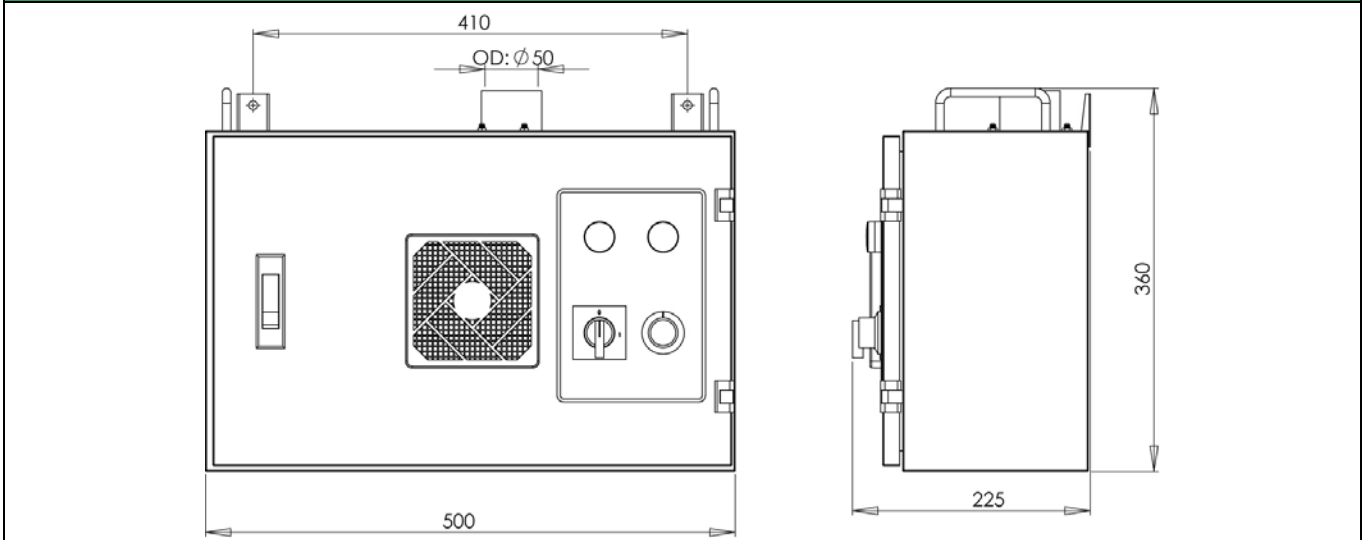

Technical Information

MODEL	Compactor/ Container approx volume	Restoration Chamber approx volume	On site Restoration approx volume	OZONE OUTPU T mg/H	INPUT VOLTAGE 1 PHASE AC	POWER Consumed (Kw)
OR-2000	0 to 6 m ³	6 to 23 m ³	23 to 38 m ³	2000	230/115 V 50/60 Hz	0.10
OR-4000	48 m ³	210 m ³	420 m ³	4000	230/115 V 50/60 Hz	0.18
OR-6000	70~425 m ³	170~4250 m ³	4250~21,24 0 m ³	6000	230/115 V 50/60 Hz	0.26

NOTE:

1. Working area temperature > 5 °C , < 40 °C , humidity < 80% RH
2. Blower Size: 0.6 m³/min

Add: 29-18 Jingshenxi 3RD Str. Daoyi Economic Development Dis. Shenyang 110136, P.R. China

E-MAIL: bodycareozone@188.com Web: <http://www.bodycareozone.com>

TEL: +86-24-89722179 FAX: +86-24-89722178

